

VILLA PERGOLA 2.0

GR-9700



- ✓ Aluminum construction with long service life
- ✓ Load up to 120 kg/m², SGS Certified
- ✓ Easy to build with assembly instructions

- ✓ Integrated roof gutter
- ✓ Double top blades
- ✓ White/grey color option

● MOTORIZED




Motorised with light



Better heat insulation



Double-layer louver



waterproof IP67 motor, 24V low voltage, more stable and safer




Villa Pergola 2.0 features 150mm square posts and wider double-layer louvers to withstand extreme weather, including heavy snow and strong winds. Built from high-quality aluminum, it offers dimmable RGB LED lighting, perimeter lighting, and full waterproofing with a water-electricity separated post for added safety. Supporting both freestanding and wall-mounted setups, the adjustable louvers provide flexible shading, withstanding winds up to 35m/s (120 km/h).

GR-9700

LOUVER SYSTEM

Double-layer waterproof blades, stronger and better heat insulation.

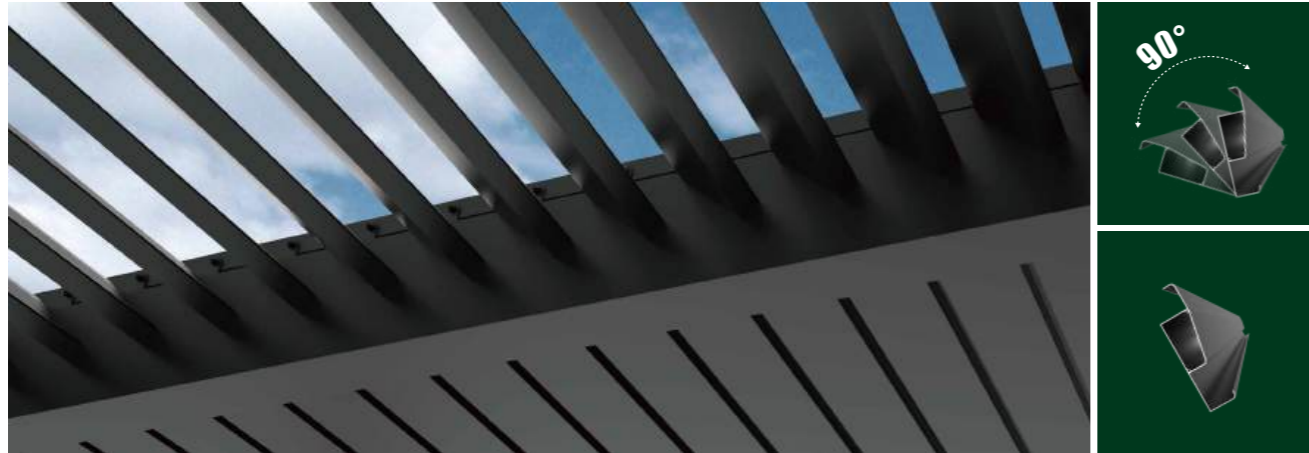

Freedom between the opening and closing, fully show the aesthetics of life.

Post
150x150x2.0mm



Louver
159.9X38X1.3mm (double layer)

Operation
Motorized


Beam with built-in gutter (motorized)
190X124.28X2.5mm

LIGHTING SYSTEM

Special waterproof LED lighting system, 24V low voltage stable and safe.

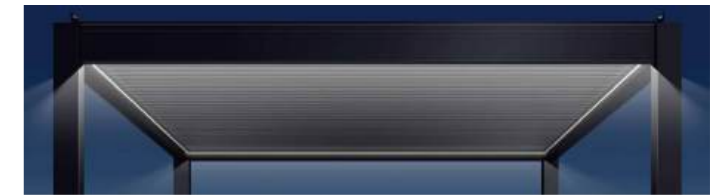

DARK GREY
RAL7016




WHITE
RAL9016

Professional outdoor powder coating, waterproof and dustproof, durable.

FUNCTIONAL FEATURES


Sun-proof, Waterproof, Ventilated



Rainproof, snow-proof, windproof



Sun-proof, Anti-UV



Ventilated



Closed




Flexible adjustment of opening and closing angle




Open

DRAINAGE SYSTEM

Hidden drainage system, no fear of heavy rain.




Hidden drainage system



Water being flowed into post




Drain to the lower end of the post



Blade grooves facilitate diversion

CONTAINER LOADING CAPACITY

| Photos | Size | Carton Size (mm) | | | N.W (Kg) | G.W (Kg) | QTY (CTN) | CTN NO | CBM | Description | 20GP | 40GP | 40HQ |
|---|------|------------------|-----|-----|----------|----------|-----------|--------|------|-------------|------|------|------|
| | | L | W | H | | | | | | | | | |
|  | 3X3 | 3050 | 450 | 210 | 59.9 | 63 | 1 | 1/4 | 0.29 | Beam+Gutter | / | 36 | 45 |
| | | 2910 | 430 | 360 | 51.3 | 54 | 1 | 2/4 | 0.47 | Louver | | | |
| | | 2930 | 420 | 260 | 35.2 | 37 | 1 | 3/4 | 0.33 | Louver | | | |
| | | 2850 | 450 | 340 | 68.4 | 72 | 1 | 4/4 | 0.47 | Post | | | |
|  | 3X4 | 3980 | 470 | 210 | 69 | 76 | 1 | 1/4 | 0.3 | Beam+Gutter | / | 28 | 35 |
| | | 2920 | 420 | 460 | 56 | 71 | 1 | 2/4 | 0.6 | Louver | | | |
| | | 2920 | 420 | 350 | 38.5 | 50 | 1 | 3/4 | 0.47 | Louver | | | |
| | | 3100 | 450 | 156 | 22 | 71 | 1 | 4/4 | 0.47 | Post | | | |
|  | 4X4 | 4070 | 470 | 200 | 72 | 85 | 1 | 1/4 | 0.3 | Beam+Gutter | / | 24 | 30 |
| | | 3970 | 420 | 460 | 78.4 | 95 | 1 | 2/4 | 0.61 | Louver | | | |
| | | 3940 | 420 | 350 | 53.9 | 61 | 1 | 3/4 | 0.47 | Louver | | | |
| | | 2850 | 450 | 156 | 22 | 71 | 1 | 4/4 | 0.47 | Post | | | |
|  | 4x6 | 5740 | 480 | 200 | 92 | 108 | 1 | 1/5 | 0.32 | Beam+Gutter | / | 18 | 22 |
| | | 3950 | 420 | 460 | 80 | 95 | 1 | 2/5 | 0.58 | Louver | | | |
| | | 3940 | 420 | 350 | 60 | 72.3 | 1 | 3/5 | 0.46 | Louver | | | |
| | | 3940 | 420 | 350 | 60 | 68 | 1 | 4/5 | 0.46 | Louver | | | |
| | | 2850 | 450 | 306 | 42 | 71 | 1 | 5/5 | 0.47 | Post | | | |
|  | 4x8 | 4070 | 710 | 230 | 104.5 | 110 | 1 | 1/6 | 0.5 | Beam | / | 13 | 17 |
| | | 3940 | 420 | 450 | 87.4 | 92 | 1 | 2/6 | 0.58 | Louver | | | |
| | | 3940 | 420 | 450 | 87.4 | 92 | 1 | 3/6 | 0.58 | Louver | | | |
| | | 3940 | 420 | 370 | 71.3 | 75 | 1 | 4/6 | 0.47 | Louver | | | |
| | | 3940 | 420 | 370 | 66.5 | 70 | 1 | 5/6 | 0.47 | Louver | | | |
| | | 3100 | 540 | 340 | 98.8 | 104 | 1 | 6/6 | 0.4 | Post | | | |